


乾式単板電磁クラッチ-フランジ取付け型

ハブ付き

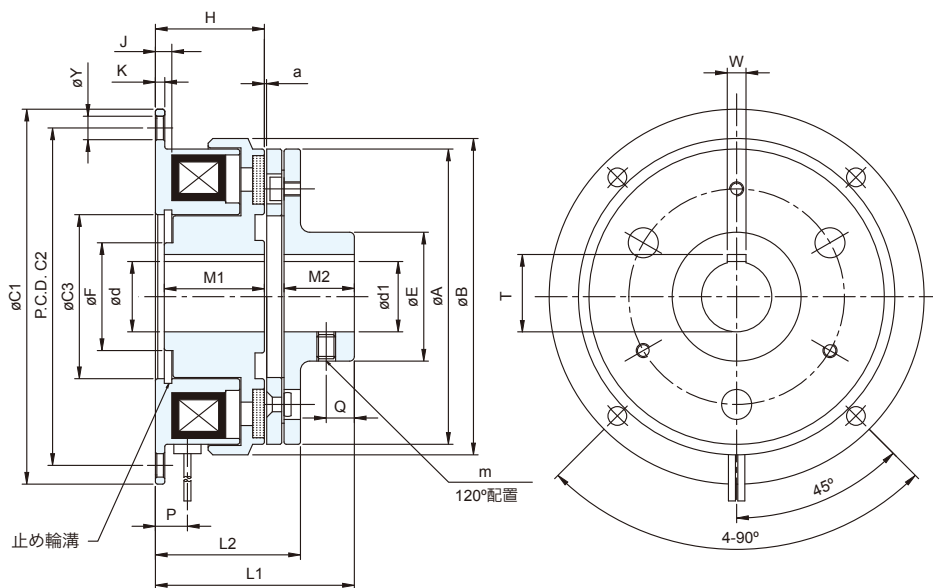

型 番		CF10S6AA(AB)	CF11S5AA(AB)	CF12S5AA(AB)	CF100SAA(AB)	CF1010AA(AB)	CF1020AA(AB)	CF1040AA(AB)
静摩擦トルク [Nm]		5.5	11	22	45	90	175	350
動摩擦トルク [Nm]		5.0	10	20	40	80	160	320
電力 [24V](W) at 20°C		11	15	20	25	35	45	60
外形寸法	A	63	80	100	125	160	200	250
	B	67.5	85	106	133	169	212.5	264
	C1	80	100	125	150	190	230	290
	C2	72	90	112	137	175	215	270
	C3	35	42	52	62	80	100	125
	d1(H7)	15 (12)	20 (15)	25 (20)	30 (25)	40 (30)	50 (40)	60 (50)
	d2(H7)							
	E	27.5	31	41	49	65	83	105
	F	23(21)	28	40	45	62	77	100
	Y	5	6	7	7	9.5	9.5	11.5
	H	24	26.5	30	33.5	37.5	44	51
	J	3.5	4.3	5	5.5	6	7	8
	K	2	2.5	3	3.5	4	5	6
	L1	43.05	51.3	60.9	70.8	85	101.2	118.5
	L2	31.55	35.3	40.9	46.8	54	65.2	75.47
	M1	22	24.1	27	30	34	40.15	47.15
	M2	15	20	25	30	38	45	54
	P	7.5	8.5	8.9	9.5	9.5	10.5	15.5
	Q	6	8	10	12	14	18	22
	m	2-M4	2-M5		2-M6	2-M8		2-M10
	a	0.2 (±0.05)			0.3 (^{+0.05} _{-0.1})		0.5 (⁰ _{-0.2})	
W	5 (4)	5 (5)	7 (5)	7 (7)	10 (7)	12 (10)	15 (12)	
T	17.3(13.8)	22.3(17.3)	28.3(22.3)	33.3(28.3)	43.8(33.3)	53.8(43.8)	65.3(53.8)	
質量 (kg)		0.5	0.91	1.66	3.05	5.4	10.5	18.7
保護素子		07D470K	07D470K		10D680K	14D680K		20D680K